



## CROSS COUNTRY MANUFACTURING

Engineered for today. Built for a lifetime.

### Live Bottom 3903BT



## The Cross Country Live Bottom is the work horse of the Live Bottom Industry.

The 60 degree wall design ensures complete clean out. The walls are constructed with the proven strength of Hardox® 450 wear-resistant steel which will keep its shape for years to come.

Efficiency, reliability, adaptability and ease of use is built into every trailer we make. We lead the industry in the ability to offer multiple axle configurations, sizes and custom specifications to meet the needs of your business. Cross Country's chain, belt and drive system is precisely engineered for maximum performance.

Whether you are hauling asphalt or aggregate, Cross Country Live Bottom belt trailers are the right choice.

418 South Railway St.  
R6M 2G2

Phone: 204-822-9509  
Fax: 204-822-9514

TF: 888-895-0833  
[www.crosscountrytrailer.com](http://www.crosscountrytrailer.com)






### Features

- Re-engineered frame design using Strenx® 100 XF high tensile steel, with a minimum yield strength of 100,000 psi
- Trailer body moved forward 2 feet, allowing for increased payload
- Lower center of gravity for increased stability
- Hardox® 450 wall liner provides exceptional wear
- Hardox® 450 tailgate
- 4" pitch roller chain
- Manifold with reversing valve and belt speed control
- When tailgate locks are engaged, automatic flip-up mudflaps pull up to prevent damage from the laydown machine
- Moisture-resistant insulation in walls
- 30,000 lb Hendrickson air ride
- P spindles, camshaft enclosures, and dust shields are standard


### Belt Tension Adjustment

- Protected sealed idler bearing

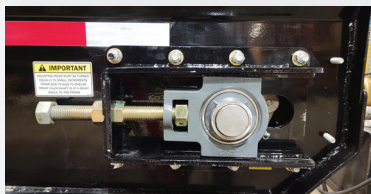

### 5th Wheel Plate

- Innovative over-the-fifth-wheel belt design distributes weight over the entire length of the tractor and trailer, including the steer axle, for maximum payloads within legal limits

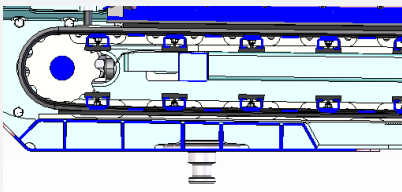

1. 18 inch extended tarp shelf
2. Automatic chain oiler for chain lubrication
3. Lightweight, corrosion-resistant front aluminum checker plate fender
4. Full flap coverage to protect from tire spray
5. Chain inspection and maintenance access door on each side
6. 32:1 Planetary gear system driven by a hydraulic motor



1. 2-speed landing gear
2. Release agent system with hose and nozzle
3. Corrosion-resistant aluminum ladder
4. Chain inspection door
5. Manifold with reversing valve and belt speed control
6. Air-operated cylinders to open and close gate



1. Clear view door indicator
2. Air-operated tailgate locks
3. Spring-loaded belt scraper
4. Heat and oil resistant belt
5. Product chute
6. Auto-lifting mudflaps
7. Aluminum planetary covers
8. Aluminum light boxes
9. LED work lamps
10. LED strobe lamps